


# EPORITE

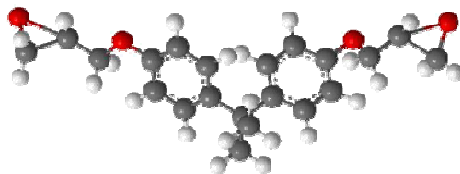

## ***EPORITE 5419 A / B***

### **GENERAL**

EPORITE 5419 A / B is a two – components clear epoxy potting and sealing system which is recommended for potting and encapsulating of electronic components.

The cured EPORITE 5419 A / B exhibits excellent, physical properties and heat stability.

### **STORAGE**

Store A & B parts at temperature lower than 30°C but not less than 5°C. Keep the containers at dry place & sealed tightly.

### **HANDLING AND SAFETY**

Gloves and glasses are suggested for user's personal protection. Clean with soap and water when skin contact.

### **PROCESSING**

1. Well mixed with mixing ratio A:B =3:1 by weight.
2. Potting/casting associated with vacuum process.
3. Curing condition at 25°C for 24 hr or at 60 ~ 80°C for 2 ~ 4 hr.

NOTE: The process can be adjusted according to the specific manufacturing process or performance requirement.

### **SPECIFICATION**

Specification	EPORITE 5419A	EPORITE 5419B
Chemical Type	Epoxy Resin	Modified Amine
Appearance	White Liquid	Clear Liquid
Specific Gravity	1.2 ± 0.1	0.9 ± 0.2
Viscosity (25°C)	13000 ± 3250 cps	≤ 50 cps
Mixing Ratio (by weight)	3	1
Shelf Life (25°C)	6 months	6 months
Mixing Viscosity (25°C)	600 ± 150 cps	
Pot Life (25°C)	150 min/132 g	
Gel Time (80°C)	17min/10 g	
Curing Condition	25°C/24 hr or 60 ~ 80°C/2 ~ 4 hr	

### **PROPERTIES OF THE CURED RESIN**

Property	EPORITE 5419 A / B
Hardness (Shore D)	80 ~ 90
Glass Transition Temperature (°C)	75 ~ 95
Coefficient of Thermal Expansion (mm/ mm/°C)	( $\alpha_1$ ) 55 ~ 75×10 <sup>-6</sup> ( $\alpha_2$ ) 160 ~ 220×10 <sup>-6</sup>
Moisture absorption (wt %)	< 0.5

### **REMARK**

The information contained is believed to be reliable and only for the reference without any effective guarantee for the application of the user. The user is responsible to determine the suitability for the user's application and the reliability of the products. Epolab Chemical will not accept claim of warranties of the fitness or reliability for a particular purpose especially the liability for consequential damages of end products.



**EPOLAB CHEMICAL INDUSTRIES INC.**

No. 11, Ho-Jiun N. Rd., Chung-Li Ind. Park, Chung-Li, Taoyuan 320, Taiwan

Tel : 886-3-4521501~3 Fax : 886-3-4529318 [service@epolab.com.tw](mailto:service@epolab.com.tw) [www.epolab.com](http://www.epolab.com)